


DM-K01-P

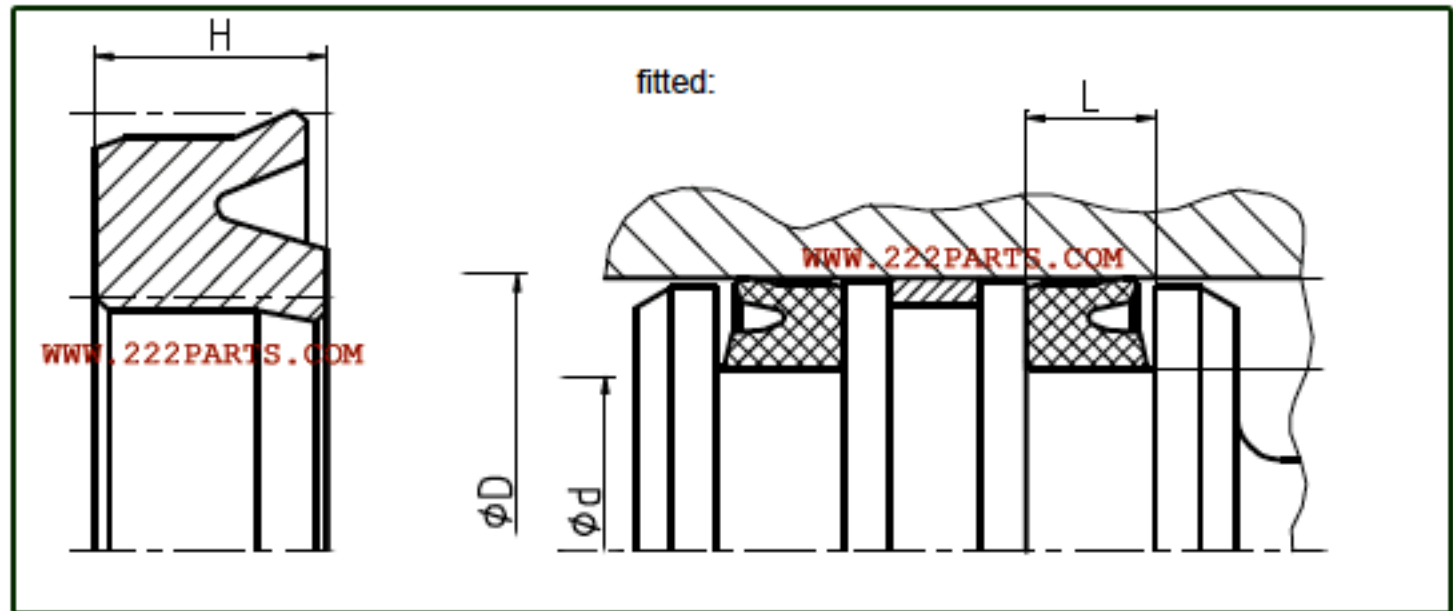

Description:

Hydraulic, single-acting

Asymmetric piston seal for standard applications. Design provides stable fit in the housing, ultimate sealing effect over a wide temperature range. Prevents extensive drag pressure. Back-to-back arrangement with guide ring in between for double-acting pistons or to separate different fluids. K01-PE has same data like K01-P

| Temperature | | Speed | Pressure | Material |
|-------------|------|-------|-------------|----------|
| min. | max. | max. | max. | |
| °C | | m/s | bar (psi) | - |
| -30 | +110 | 0,5 | 400 (5 800) | ECOPUR |
| -20 | +110 | 0,5 | 400 (5 800) | H-ECOPUR |
| -20 | +110 | 0,7 | 400 (5 800) | S-ECOPUR |
| -50 | +110 | 0,5 | 400 (5 800) | T-ECOPUR |
| -30 | +110 | 0,5 | 400 (5 800) | G-ECOPUR |

Request Quotation. / แบบสอบถามราคา

PISTON SEAL (PROFILE : DM-K01-P)

Ød (เส้นผ่าศูนย์กลางใน / วัดขนาดจากเหล็ก) = _____ MM

ØD (เส้นผ่าศูนย์กลางนอก / วัดขนาดจากเหล็ก) = _____ MM

L (ความหนาของเหล็ก) = _____ MM

H (ความหนาซีล) = _____ MM

Pressure / แรงดัน = _____ bar

Temp./ อุณหภูมิ = _____ C

จำนวน = _____ EA

Hydraulic / น้ำมัน Pneumatic / อากาศ

รายละเอียดลูกค้า

บริษัท _____

ชื่อผู้ติดต่อ _____ แผนก _____

โทร _____

แฟกซ์ _____

Email _____

กรุณากรอกข้อมูลตามความจริง เพราะทางบริษัทจะส่งใบเสนอราคาไปให้ตามลูกค้าระบุไว้
Email (1) : inbox@222parts.com, Email (2) : inbox_222parts@hotmail.com