


DM-S02-P

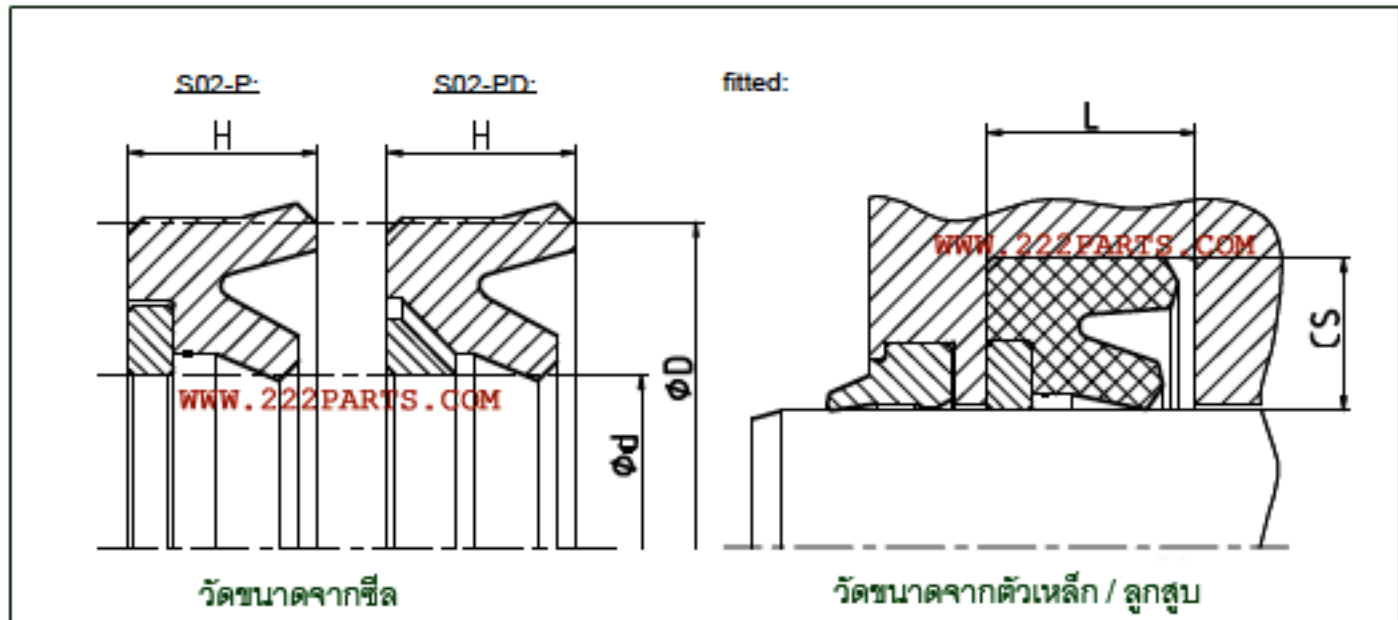

Description:

Hydraulic, single-acting

Asymmetric rod seal for standard applications as S01-P, but due to design with active back-up ring suit-

able for larger extrusion gaps or higher pressure range. S02-P for standard housing design

WWW.222PARTS.COM

Temperature Speed Pressure Material
min. max. max. max.

°C	m/s	bar (psi)	Seal	Back-up
-30	+100	0,5	700 (10 000) ECOPUR	ECOTAL
-20	+100	0,5	700 (10 000) H-ECOPUR	ECOTAL
-20	+100	0,7	700 (10 000) S-ECOPUR	ECOTAL
-40	+100	0,5	700 (10 000) T-ECOPUR	ECOTAL
-30	+100	0,5	700 (10 000) G-ECOPUR	ECOTAL

Request Quotation. / แบบสอบถามราคา

PROFILE DM-S02-P

ระบุขนาดที่ DRAWING ด้านบนค่ะ

Pressure / แรงดัน = _____ bar

Temp. / อุณหภูมิ = _____ C

จำนวน = _____ EA

Hydraulic / น้ำมัน Pneumatic / อากาศ

รายละเอียดลูกค้า

บริษัท _____

ชื่อผู้ติดต่อ _____ แผนก _____

โทร _____

แฟกซ์ _____

Email _____

กรุณารอกข้อมูลตามความจริง เพราะทางบริษัทจะส่งใบเสนอราคาไปให้ตามลูกค้าระบุไว้
Email (1) : inbox@222parts.com, Email (2) : inbox_222parts@hotmail.com