Profile Description

DM-S04-P

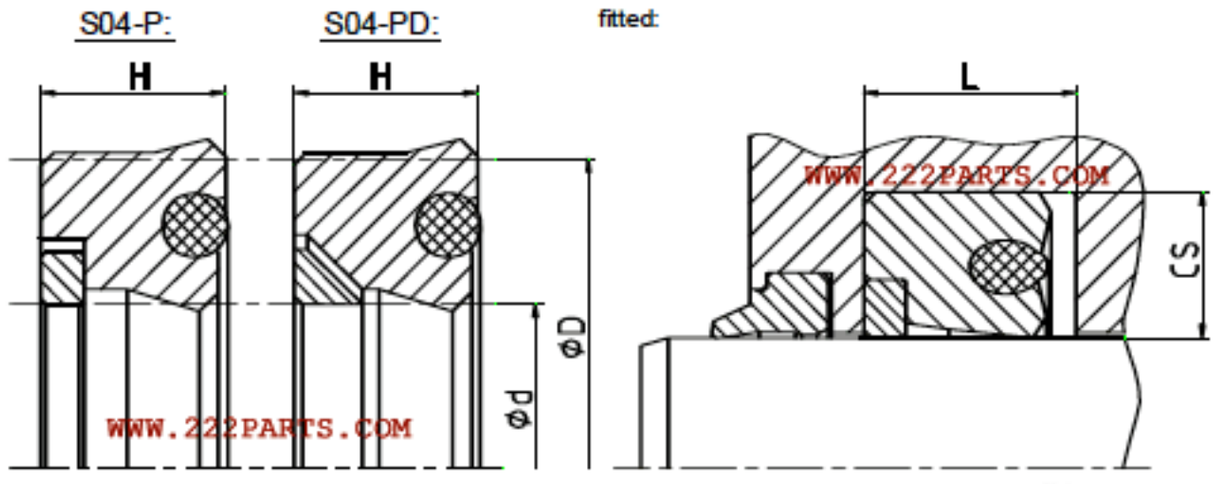

Description:

Hydraulic, single-acting

Asymmetric rod seal for standard applications as S03–P, but due to design with active back–up ring suitable for larger extrusion gaps or higher pressure range. S04–P for standard housing design.

WWW.222PARTS.COM

Temperature min.	Temperature max.	Speed max.	Pressure max.	Material		
°C		m/s	bar (psi)	Seal	O–ring	Back–up
–30	+100	0,5	700 (10 000)	ECOPUR	NBR 70	ECOTAL
–20	+100	0,5	700 (10 000)	H-ECOPUR	NBR 70	ECOTAL
–40	+100	0,5	700 (10 000)	T-ECOPUR	MVQ 70	ECOTAL
–20	+100	0,7	700 (10 000)	S-ECOPUR	NBR 70	ECOTAL

Request Quotation. / แบบสอบถามราคา

PROFILE DM-S04-P

ระบุขนาดที่ DRAWING ด้านบนค่ะ

Pressure / แรงดัน = _____bar

Temp./ อุณหภูมิ = _____C

จำนวน = _____EA

☐ Hydraulic / น้ำมัน ☐ Pneumatic / ลม

WWW.222PARTS.COM

รายละเอียดลูกค้า

บริษัท .....

ชื่อผู้ติดต่อ ..... แผนก .....

โทร .....

แฟกซ์ .....

Email .....

กรุณากรอกข้อมูลตามความจริง เพราะทางบริษัทจะส่งใบเสนอราคาไปให้ตามลูกค้าระบุไว้

Email (1) : inbox@222parts.com, Email (2) : inbox_222parts@hotmail.com

222PARTS.COM

TEL : 02-9393420 , FAX : 02-9030080 EXT 1185

WWW.222PARTS.COM