


DM-S32-P

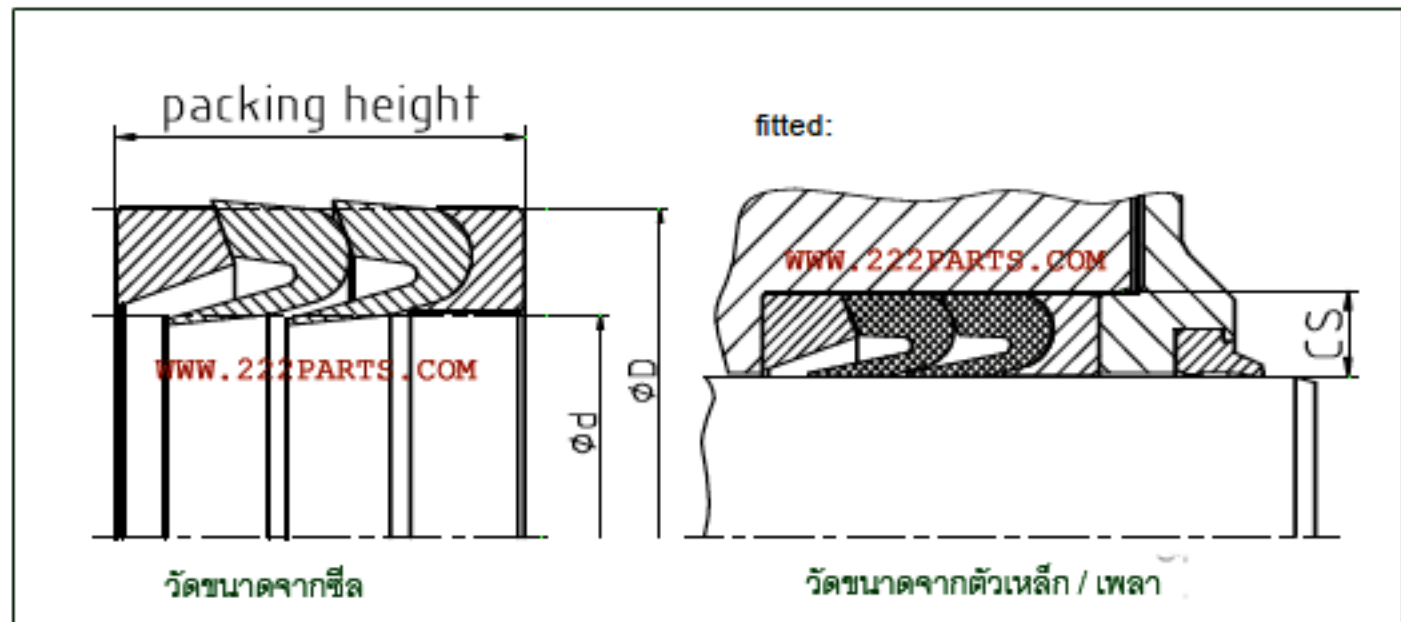

Description:

Hydraulic, single-acting
Chevron set, design with extremely flexible sealing lips for difficult operating conditions (bad guiding, large tol-

erance range). Available as total chevron set as well as intermediate chevrons only (in case of metal male and female adaptors).

WWW.222PARTS.COM

Temperature Speed Pressure Material
min. max. max. max.

°C m/s bar (psi)

Temperature	Speed	Pressure	Material	Pressure ring	Seal	Support ring
-30 +100	0,5	500 (7 200)	ECOTAL ¹⁾	ECOTAL ¹⁾	ECOPUR ³⁾	ECOTAL ¹⁾
-20 +100	0,5	500 (7 200)	ECOTAL ¹⁾	ECOTAL ¹⁾	H-ECOPUR	ECOTAL ¹⁾
-40 +100	0,5	500 (7 200)	ECOTAL ¹⁾	ECOTAL ¹⁾	T-ECOPUR	ECOTAL ¹⁾
-20 +100	0,7	500 (7 200)	ECOTAL ¹⁾	ECOTAL ¹⁾	S-ECOPUR	ECOTAL ¹⁾
-30 +100	0,5	500 (7 200)	X-ECOPUR	X-ECOPUR	ECOPUR	ECOTAL ¹⁾
-20 +100	0,5	500 (7 200)	XH-ECOPUR	XH-ECOPUR	H-ECOPUR	ECOTAL ¹⁾
-20 +100	0,7	500 (7 200)	XS-ECOPUR	XS-ECOPUR	S-ECOPUR	ECOTAL ¹⁾
-30 +100	0,5	500 (7 200)	G-ECOPUR 54D	G-ECOPUR 54D	G-ECOPUR	ECOTAL ¹⁾

Request Quotation. / แบบสอบถามราคา

PROFILE DM-S32-P

ระบุขนาดที่ DRAWING ด้านบนค่ะ

Pressure / แรงดัน = _____ bar

Temp./ อุณหภูมิ = _____ C

จำนวน = _____ EA

Hydraulic / น้ำมัน Pneumatic / อากาศ

รายละเอียดลูกค้า

บริษัท _____

ชื่อผู้ติดต่อ _____ แผนก _____

โทร _____

แฟกซ์ _____

Email _____

กรุณากรอกข้อมูลตามความจริง เพราะทางบริษัทจะส่งใบเสนอราคาไปให้ตามลูกค้าระบุได้
Email (1) : inbox@222parts.com, Email (2) : inbox_222parts@hotmail.com